




Insele i150

Solar Battery with Charger and 12V Lighting



Initially designed as a rechargeable basic electricity source and power bank unit for rural homes, the i150 has been rolled out to multiple countries across southern Africa, bringing safe and reliable power and light sources to thousands of homes that previously had no electricity access.

The i150 consists of 4x Insele dimmable lights, 2x USB ports and 1x 12VDC socket with a 12V 12Ah LiPo battery and 40W solar panel.

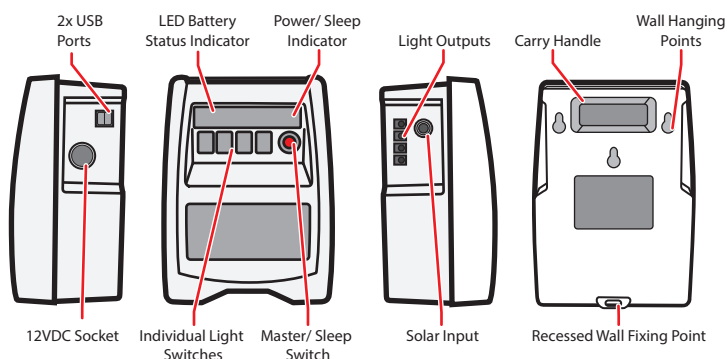


Specifications:



- ◆ 3 x Wallmount lights
- ◆ 1 x Outdoor IP65 Floodlight
- ◆ 12VDC dual-function LED lights
- ◆ 0.6W dim, 3.5W full brightness
- ◆ Individual switches on unit
- ◆ Plug and play wiring
- ◆ 12Ah 12V LiPo battery
- ◆ 2x USB Ports 2x1A or 1x2A, 1x 12VDC Socket
- ◆ Input Voltage: 18/22VDC
- ◆ Est. Run Time: 10hrs+; Est. Charge Time: 3.5hrs
- ◆ 40W Mono/ Poly-Crystalline Solar Panel
- ◆ Unit Size: 170x110x210mm; 3.5kgs



Typical Installation:

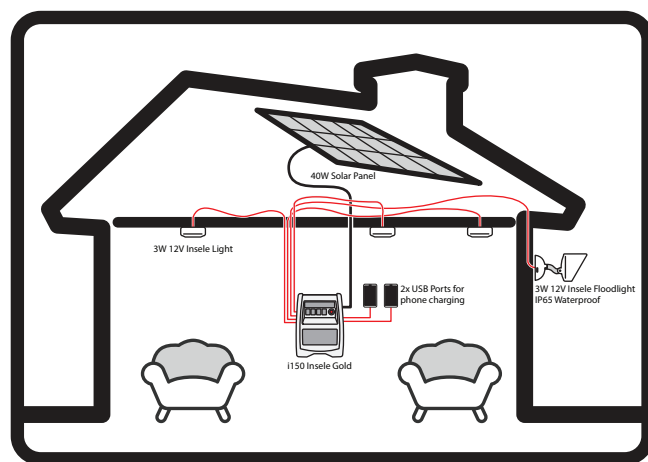

BASIC ELECTRICITY FOR THE COST OF SUNSHINE
 Visit www.insele-solar.co.za to find your local dealer
 Made in South Africa