




i150 6 USB

Solar Battery with Charger, 6x USB & 12V Lighting



The i150 6 USB is the commercial version of the original i150, designed as a rechargeable 12VDC electricity source and power bank unit for spaces without electricity access. The 6x USB unit is ideal for kiosks or spaza shops to charge multiple devices at once as well as being able to provide 12V lighting. The i150 6 USB consists of 4x dimmable lights with switches, 6x USB ports and 1x 12VDC socket with a 12V 12Ah LiPo battery and 40W solar panel.

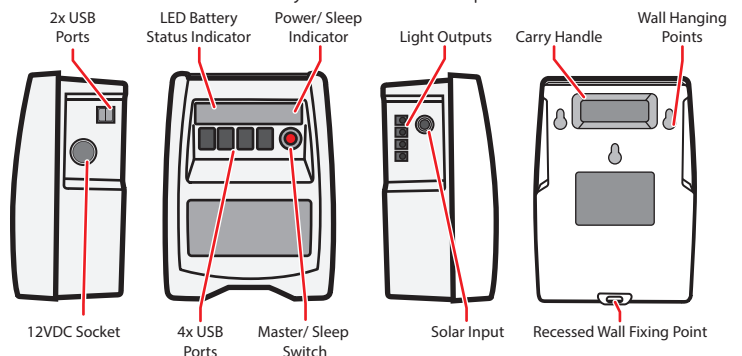

Specifications:



- ◆ 3 x Wallmount lights
- ◆ 1 x Outdoor IP65 Floodlight
- ◆ 12VDC dual-function LED lights
- ◆ 0.6W dim, 3.5W full brightness
- ◆ 4x Switches (to be wired in line with light)



- ◆ 12Ah 12V LiPo battery
- ◆ 6x USB Ports 3x2A or 6x1A, 1x 12VDC Socket
- ◆ Input Voltage: 18/22VDC
- ◆ Est. Run Time: 10hrs+; Est. Charge Time: 4hrs
- ◆ 40W Mono/ Poly-Crystalline Solar Panel
- ◆ Unit Size: 170x110x210mm; 3.5kgs

Typical Installation:

